




POOL
SYSTEM

POOL LED LIGHT

» SMD LED.

» Premium Quality.



POOL
SYSTEM

LGT-SD-M



LGT-SD-M145-9W



LGT-SD-M120-6W




LGT-SD-M82-3W




Product Benefits

- Multi-color are available
- Epistar or Bridgelux LEDs, creates amazing lighting performance.
- Easy to install and use.
- Low power consumption, no ultraviolet.

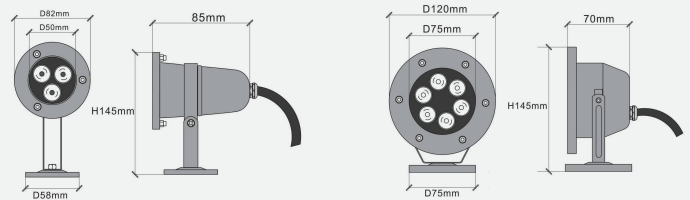

Product Features

- Widely used for decorative underwater area.
- High quality PMMA lens with good performance light.
- Safety working voltage (12V ac)
- Energy saving 80% to replace metal halide light.

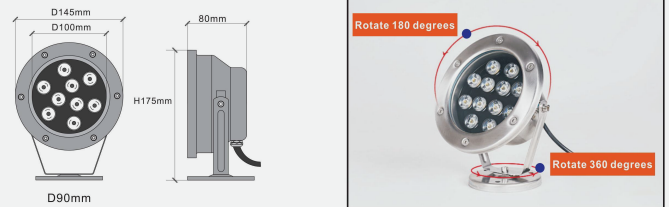

Technical Data

Item No.	Watts	Size (mm)	Beam Angle	Temperature	LED Chips	Warranty
LGT-SD-M82	3/9W	D82*H145	30/45/60	W/WW/Y/R/G/B/RGB	Epistar/Brigellux/Cree	2 Years
LGT-SD-M120	5/6/7/18W	D120*H145	30/45/60	W/WW/Y/R/G/B/RGB	Epistar/Brigellux/Cree	2 Years
LGT-SD-M145	9/12/27/36W	D145*H175	30/45/60	W/WW/Y/R/G/B/RGB	Epistar/Brigellux/Cree	2 Years

Grade	Volt	Material	G.W(KG)	Packing
IP68	12V/24V	304 Stainless	0.28	30PCS/52*26*32CM
IP68	12V/24V	304 Stainless	0.53	30PCS/50*39*31CM
IP68	12V/24V	304 Stainless	0.85	20PCS/57.5*34.5*41CM

LGT-SD-M



LGT-SD-M190-18W



LGT-SD-M210-24W





Product Benefits

- Multi-color are available
- Epistar or Bridgelux LEDs, creates amazing lighting performance.
- Easy to install and use.
- Low power consumption, no ultraviolet.

Product Features

- Widely used for decorative underwater area.
- High quality PMMA lens with good performance light.
- Safety working voltage (12V ac)
- Energy saving 80% to replace metal halide light.

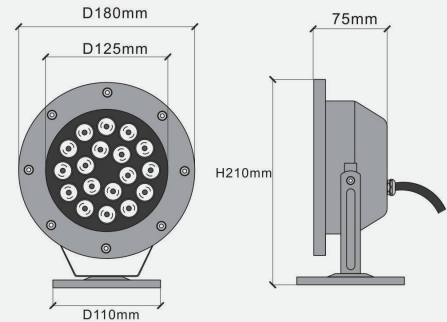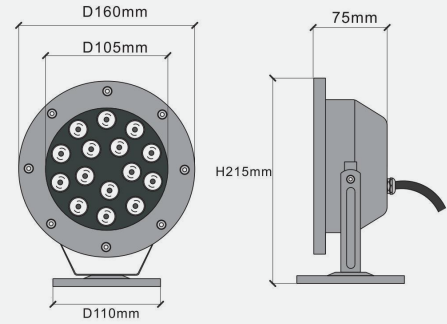

Technical Data

Item No.	Watts	Size (mm)	Beam Angle	Temperature	LED Chips	Warranty
LGT-SD-M180	18W	D180*H210	30/45/60	W/WW/Y/R/G/B/RGB	Epistar/Brigelux/Cree	2 Years
LGT-SD-M190	18W	D190*H210	30/45/60	W/WW/Y/R/G/B/RGB	Epistar/Brigelux/Cree	2 Years
LGT-SD-M210	24W	D210*H250	30/45/60	W/WW/Y/R/G/B/RGB	Epistar/Brigelux/Cree	2 Years
LGT-SD-M230	36W	D230*H250	30/45/60	W/WW/Y/R/G/B/RGB	Epistar/Brigelux/Cree	2 Years

Grade	Volt	Material	G.W(KG)	Packing
IP68	12V / 24V	304 Stainless	1.13	12PCS/42*42*42CM
IP68	12V / 24V	304 Stainless	1.36	12PCS/42*42*42CM
IP68	12V / 24V	304 Stainless	1.6	8PCS/ 48.5*39*50CM
IP68	12V / 24V	304 Stainless	2.11	8PCS/48.5*39*50CM