


KP SERIES PUMP

KP series are used for water circulation in all kinds of small domestic swimming pools. Slightly dirty water with solids in suspension can be perfectly filtered.


Features:

- Liquid Temperature: 5~ 50 °C (41 ~ 122 °F).
- Ambient Temperature: up to 40 °C (104 °F).
- Maximum working pressure: 3.0 bar.
- IPX5 waterproof standard.
- Insulation Class: F.
- Thermal protection included.
- Single phase: 220V/50Hz.
- 220V/60Hz, 110V/60Hz; 380V/50Hz(P≥450W) are available on request.


• Max.Suction:3M(P≥600W)

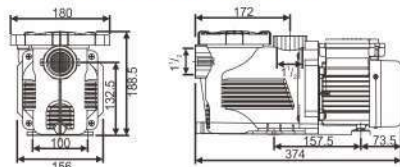


KP256~WL-KP456

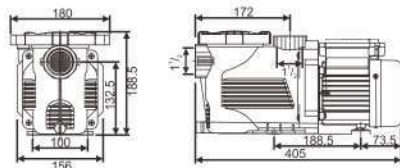

KP556~KP856

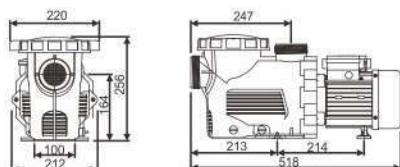

Kp1106

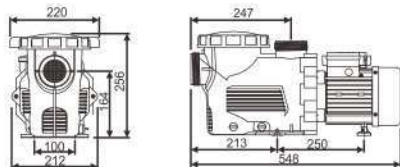

KP1606~KP2206




KP256~KP856



KP1106~KP2206

QH.Curve of The Pump

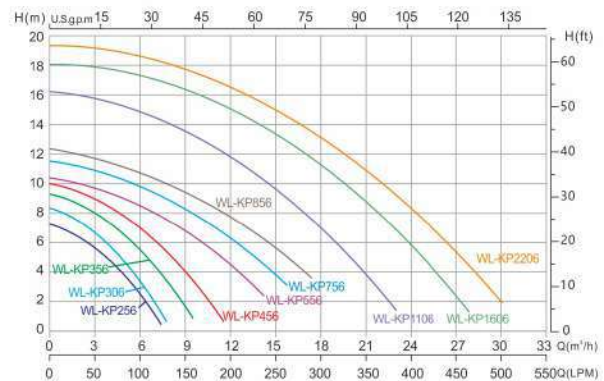

| Model | Q-max (m³/h) | H-max (m) | Horsepower (HP) | Rated Power (kW) | Phase | Voltage (V) | Connection Size |
|--------|--------------|-----------|-----------------|------------------|-------|-------------|--------------------------------|
| KP256 | 7.5 | 7 | 0.33 | 0.25 | 1 | 220 | 1.5" or 50mm |
| KP306 | 7.5 | 8.5 | 0.4 | 0.3 | 1 | 220 | 1.5" or 50mm |
| KP356 | 9.6 | 9.5 | 0.5 | 0.35 | 1 | 220 | 1.5" or 50mm |
| KP456 | 11.1 | 10 | 0.6 | 0.45 | 1 | 220 | 1.5" or 50mm |
| KP556 | 14.1 | 12 | 0.75 | 0.55 | 1 | 220 | 1.5" or 50mm |
| KP756 | 15.6 | 12.5 | 1.0 | 0.75 | 1 | 220 | 1.5" or 50mm |
| KP856 | 16.5 | 12.5 | 1.2 | 0.85 | 1 | 220 | 1.5" or 50mm |
| KP1106 | 22.5 | 16 | 1.5 | 1.10 | 1 | 220 | 48.5mm & 50mm or 60.3mm & 63mm |
| KP1606 | 27.9 | 18 | 2.0 | 1.60 | 1 | 220 | 48.5mm & 50mm or 60.3mm & 63mm |
| KP2206 | 30.9 | 19.5 | 3.0 | 2.20 | 1 | 220 | 48.5mm & 50mm or 60.3mm & 63mm |