

JP


SERIES SELF-PRIMING PUMPS WITH PLASTIC BODY

JP Series self-priming electric pumps, equipped with waterproof plug & power cord and watertight switch, It is suitable for gardening, water supply, washing, increase water pressure, etc. It is usually can be combined with a pressure switch and a surge tank to be used as a Domestic Water System for distributing water.

Pump body: ABS(reinforced ABS)/PPO
Impeller: Brass/Noryl/PPO
Shaft: 45# steel/stainless steel
Insulation class: B/F
Protection class: IP44/IP54
Mechanical seal: Carbon-ceramic / upon request
Motor with thermal protector upon request



H PERFORMANCE CHART AT n=2850 r/ min

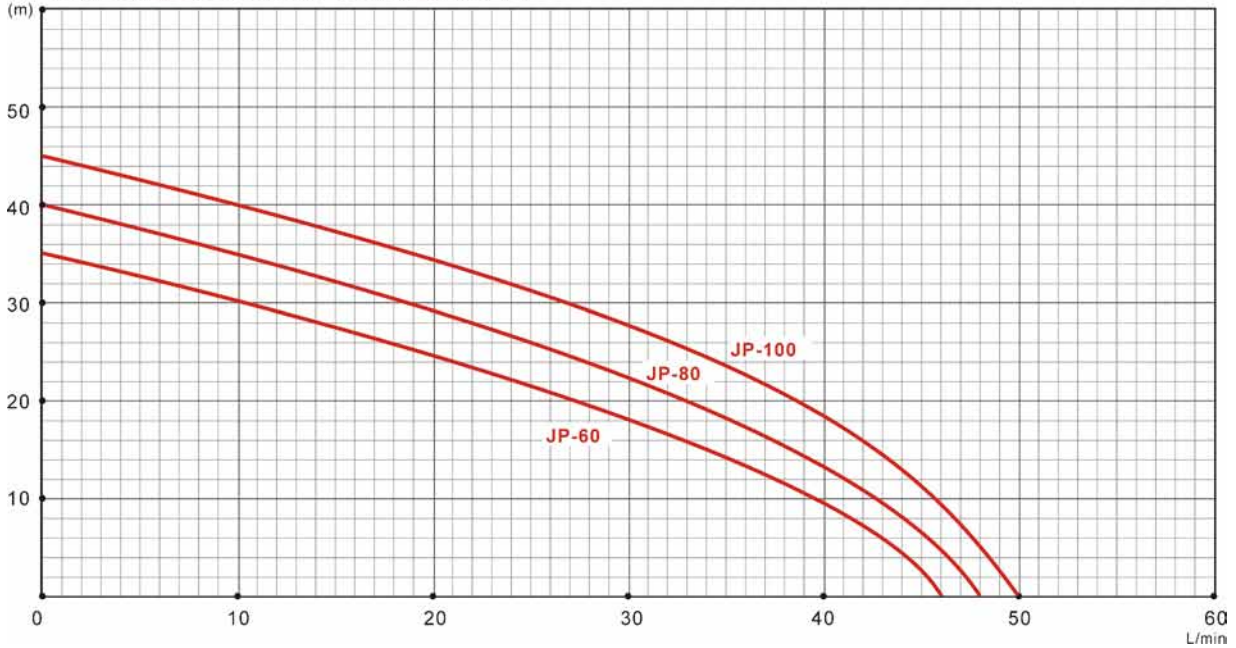

TECHNICAL DATA

| MODEL | Max. Capacity (L/min) | Max. Head (m) | Max. Suct.lift (m) | Speed (r.p.m) | Power (w) | Volt (v) | Freq. (Hz) | Pump dia | Net weight (kg) | Overall dimension (mm) |
|--------|-----------------------|---------------|--------------------|---------------|-----------|----------|------------|----------|-----------------|------------------------|
| JP-60 | 46 | 35 | 9 | 2850 | 460 | 220 | 50 | 1"X1" | 8.0 | 410X220X360 |
| JP-80 | 48 | 40 | 9 | 2850 | 600 | 220 | 50 | 1"X1" | 9.7 | 410X220X360 |
| JP-100 | 50 | 45 | 9 | 2850 | 750 | 220 | 50 | 1"X1" | 9.9 | 410X220X360 |

The following are available: Three phase; Single phase dual-voltage 110V/220V/50Hz; and single Phase uni-voltage 230V/50Hz; 240V/50Hz; 110V/60Hz, 115V/60Hz, 127V/60Hz .