

PB-Y Series Acrylic Water Descent



LED Water Descent

- Features, one-piece molding, more sturdy, uniform water output, beautiful and elegant design.
- Acrylic material, high temperature resistant, corrosion resistance, oxidation resistance.
- Constant Water Flow, Uniform and smooth water discharge effect.
- Suitable for villas, courtyards, gardens, pool water curtain walls.



Special color of mobile phone APP

- More than 18 million colors.
- 20 static and dynamic modes.
- custom made.
- colorful sync control mode.
- color changes with music mode.
- can be controlled by APP or remote control.

APP control

Color adjustment



outlet:30mm/150mm/230mm


Backwards Take over

Downwards Take over


A variety of plug specifications to choose from




Installation of waterfall lamp with Valve

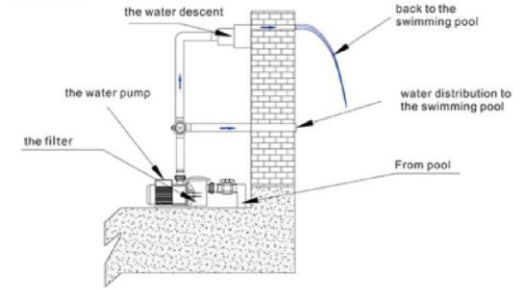

Build with circulation pumps (110V)



Build with Submersible Pump (24/48 Volt)

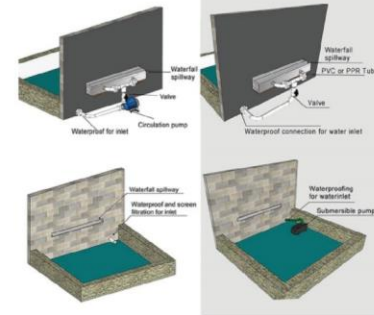

Technical Data:

Model	Length (mm)	Lip (mm)	Connection	LED Strip (W)	Input Voltage	Output Voltage
PB-Y300	300	30/150/230	1.5"/50mm	/	AC110-240V	DC12V
PB-Y600	600	30/150/230	1.5"/50mm	/	AC110-240V	DC12V
PB-Y900	900	30/150/230	1.5"/50mm	/	AC110-240V	DC12V
PB-Y1200	1200	30/150/230	1.5"/50mm	/	AC110-240V	DC12V
PB-Y1500	1500	30/150/230	1.5"/50mm	/	AC110-240V	DC12V
PB-Y300L	300	30/150/230	1.5"/50mm	4W	AC110-240V	DC12V
PB-Y600L	600	30/150/230	1.5"/50mm	8W	AC110-240V	DC12V
PB-Y900L	900	30/150/230	1.5"/50mm	12W	AC110-240V	DC12V
PB-Y1200L	1200	30/150/230	1.5"/50mm	17W	AC110-240V	DC12V
PB-Y1500L	1500	30/150/230	1.5"/50mm	21W	AC110-240V	DC12V

*The above data is for reference only, and there may be some deviation in actual production and use.

*Standard Acrylic water descents with LED strip, includes cable+plug+control.

*Acrylic water descents LED strip is replaceable.